
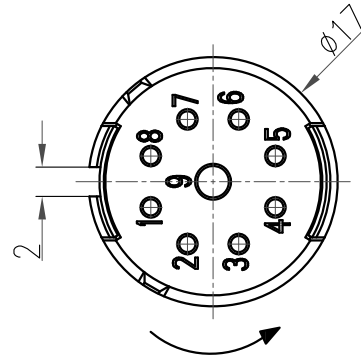


技术参数:

- 插针数: 9
- 额定电流
 - 电力针: 1*15A
 - 信号针: 8*7A
- 额定电压: 25V~/60V-
- 额定脉冲电压: 1.5KV
- 污染等级: 3
- 绝缘电阻: $\geq 10^{12}\Omega$
- 温度范围: $-40^{\circ}\text{C} \dots +115^{\circ}\text{C}$
- 阻燃等级: V0 (UL94)
- 接触电阻: $\leq 5\text{m}\Omega$
- 插拔次数: ≥ 100
- 插体材料: PBT
- 插针材料: 铜合金
- 电镀材料: 金
- 接线方式: 焊接连接
- 导线截面规格:
 - 电力针: $0.14-2.5\text{mm}^2$ (26-14AWG)
 - 信号针: $0.14-1.0\text{mm}^2$ (26-16AWG)


Technical specification:

- Number of contacts: 9
- Rated current
 - power contact: 1*15A
 - signal contact: 8*7A
- Rated voltage: 25V~/60V-
- Rated impulse voltage: 1.5KV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{12}\Omega$
- Temperature range: $-40^{\circ}\text{C} \dots +115^{\circ}\text{C}$
- Flammability acc.to UL94: V0 (UL94)
- Contact resistance: $\leq 5\text{m}\Omega$
- Mating cycles: ≥ 100
- Material of insert: PBT
- Material of contact: copper alloy
- Contact plating: Au
- Terminal: Solder terminal
- Wire gauge:
 - power contact: $0.14-2.5\text{mm}^2$ (26-14AWG)
 - signal contact: $0.14-1.0\text{mm}^2$ (26-16AWG)

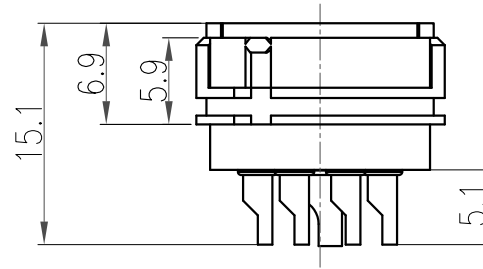

触点排列: 配合面

Contact arrangement: mating side



						表面处理 Finish	—				图号 Drawing No.	—	
						材料 Material	—				产品代号 Part Code	HR23-009-FST	
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date					产品料号 Part No.	1810090230001
	姓名/Name	日期/Date			姓名/Name		日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	TC CHEN	04.05.2016	标准化 Stand.		—	—	2:1	V1.0	4.4g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		
审核 Checked	ZM LIN	04.05.2016											
工艺 Process	—	—	批准 Approved	YY LUO	04.05.2016			All Dimensions in mm Original Size DIN A 4					